


# 100 DC Centrifugal fan

× 25mm

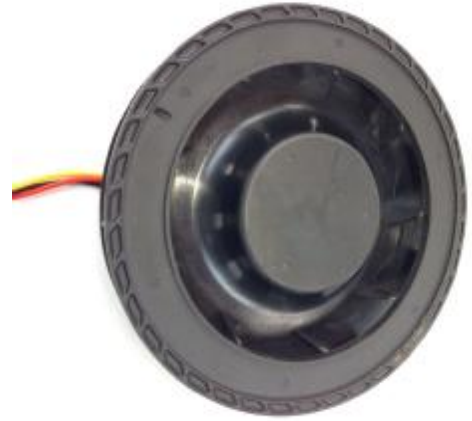



## General Specifications

- Motor : 6 Poles brushless DC motor
- Frame & Impeller: Plastic (UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

## Major Characteristic Parameters

品牌	轴承	电压	启动电压	电流	功率	转速	风量	静压	燥音		
型号	B/S	V	V	A	W	RPM	m3/min	CFM	mm-H2O	Pa	dba
SP12025H12	B/S	12	7.0to13.8	0.08	9.60	3500	2.55	90	38.5	377.5	47.5
SP1225L12	B/S	12	7.0to13.8	0.29	3.48	2500	0.67	24.18	13.16	0.51	31.0
SP1225L24	B/S	24	12.0to27.6	0.15	3.60	2500	0.67	24.18	13.16	0.51	31.0
SP1225M12	B/S	12	7.0to13.8	0.35	4.50	3000	0.81	29.02	15.76	0.61	37.2
SP1225M24	B/S	24	12.0to27.6	0.18	4.32	3000	0.81	29.02	15.76	0.61	37.2
SP1225H12	B/S	12	7.0to13.8	0.41	4.92	3500	0.95	33.85	18.42	0.72	43.5
SP1225H24	B/S	24	12.0to27.6	0.21	5.04	3500	0.95	33.85	18.42	0.72	43.5
SP1225LH12	B/S	12	7.0to13.8	0.47	5.64	4000	1.08	38.68	21.06	0.82	49.7
SP1225LH24	B/S	24	12.0to27.6	0.24	5.76	4000	1.08	38.68	21.06	0.82	49.7
SP1225MH12	B/S	12	7.0to13.8	0.53	6.36	4500	1.22	43.52	23.69	0.92	55.9
SP1225MH24	B/S	24	12.0to27.6	0.27	6.48	4500	1.22	43.52	23.69	0.92	55.9

\*Bearing system B: Two Ball Bearing S: Sleeve Bearing

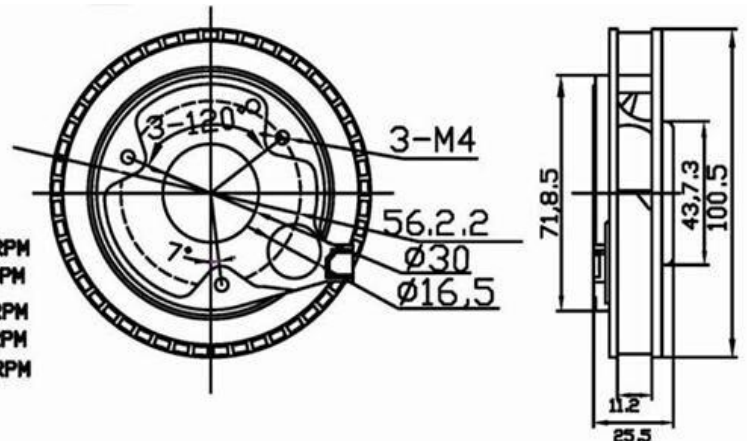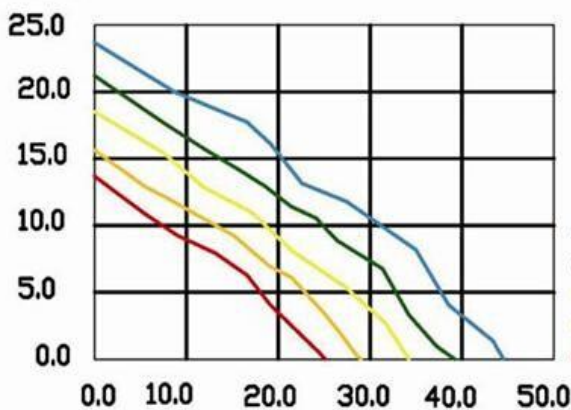

注: 如果您需要的电压、转速、功率、风量、噪音等不在这清单上, 请与我们联系! If you need a voltage, speed, power, wind, noise, etc. are not on this list, please contact us!